HLS
hard lock systems

HLS One Card System Configuration

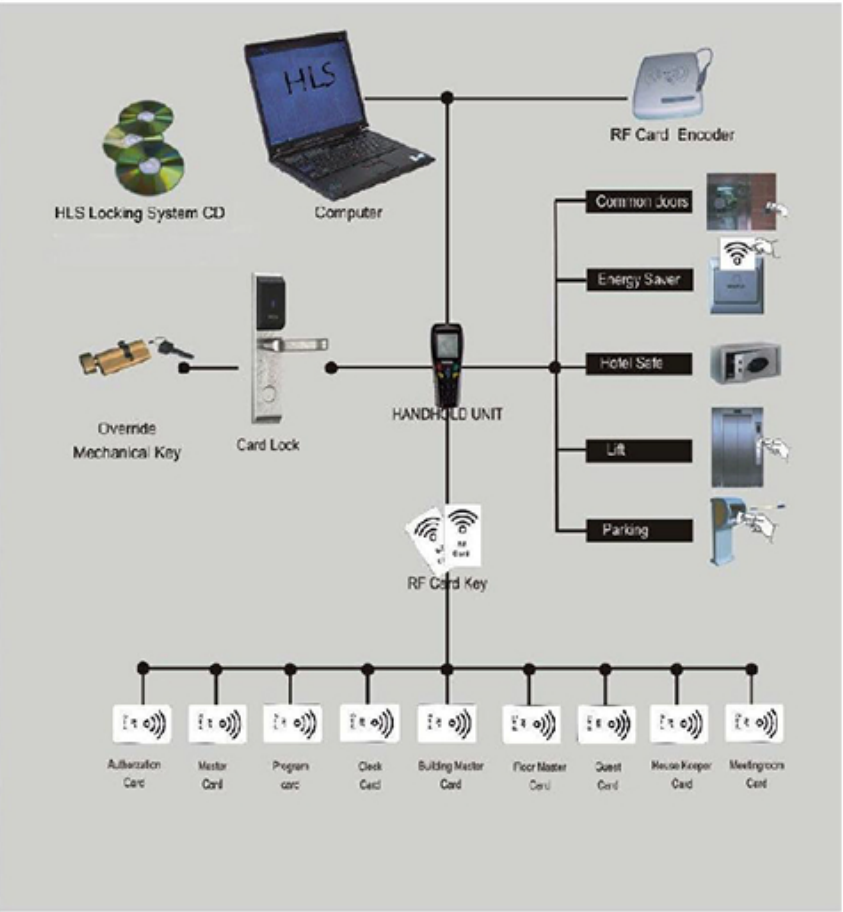

HLS D2054 Mifare RFID Lock

Valuable Features:
Smooth design fit all envoriment
Replace your old mechanical Lock with our electronic lock
Keep your mortise and carpentry, save your door & money

TECHNICAL PARAMETERS

Dimension of External Panel:	L270mm*W75mm
Material:	Zinc Alloy, PVD Moisture Proof
Working Voltage:	DC 6V or 4 AA Alkaline batteries
Power Consumption:	Static Load <10Ua Dynamic Load 100~150Ma
Working Enviroment:	Working Humidity: 20%-90% Working Temperature: -20 C-60 C
Keycard Option:	MIFARE 1K card

FUNCTIONAL CHARACTERISTICS

- Interface with most of the PMS systems, CE & FCC Certified!
- PVD Coating Stainless steel color last more than 10 years
- ANSI standard mortise
- Inside deadbolt, Inside handle retracts latches and deadbolt
- Mifare 1K card compatible with Mifare Energy Saver
- Override Computer Key for Emergency use, individual or master cylinder
- Personalized locking system and cylinder cover
- Step by step installation software, easy operation
- Classified Access Authorization for safety management
- General master card, building master card, floor master card, guest card, Fire alarm card
- All cards with validity, guest card expires automatically at default check out date and time
- Lost guess card suspension simply by issuing a new guest card with suspending function
- Multiple operators with different card issuing authorizations
- Lock operation record printable:256pcs
- Receptionist card issuing records printable
- Power: 4 pcs AA Alkaline batteries. 18 months duration
- Low battery voltage warning. (Lower than 3.5V.)
- Self Error detecting by LED and beep
- Improper lock warning
- Wireless stand alone lock realizes 95% of online lock function

HLS E3041 Mifare RFID Lock

Valuable Features:
Waterproof idea for outdoor use
Replace your old mechanical Lock with our electronic lock
Keep your mortise and carpentry, save your door & money

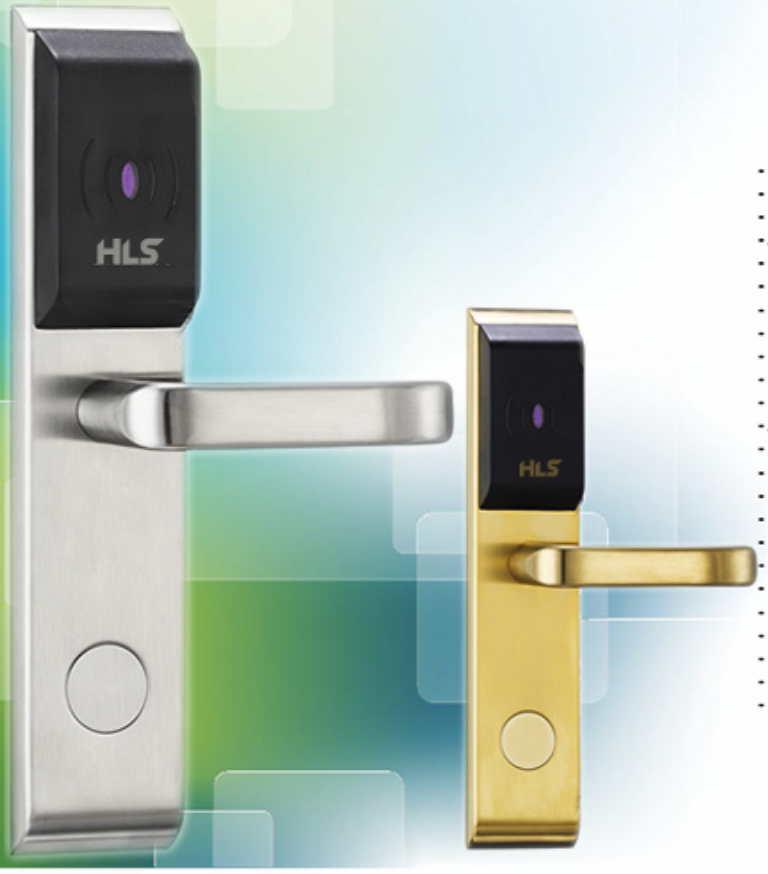

TECHNICAL PARAMETERS

Dimension of External Panel:	L290mm*W60mm*H34mm
Material:	Stainless Steel, Moisture Proof, Fire Reterdant
Working Voltage:	DC 6V or 4 AA Alkaline batteries
Power Consumption:	Static Load <10Ua Dynamic Load 100~150Ma
Working Enviroment:	Working Humidity: 20%-90% Working Temperature: -50 C-60 C
Keycard Option:	MIFARE 1K card

FUNCTIONAL CHARACTERISTICS

- Interface with most of the PMS systems, Fidelio/Opera registered!
- CE & FCC Certified!
- Stainless steel color last more than 10 years
- ANSI standard mortise, 72mm/85mm hole distance
- Inside deadbolt, Inside handle retracts latches and deadbolt
- Mifare 1K card compatible with its own energy saver
- Override Computer Key for Emergency use, individual or master cylinder
- Personalized locking system and cylinder cover
- Step by step installation software, easy operation
- Classified Access Authorization for safety management
- General master card, building master card, floor master card, guest card, Fire alarm card
- All cards with validity, guest card expires automatically at default check out date and time
- Meeting room function and three levels of passage door functions
- Lost guess card suspension simply by issuing a new guest card with suspending function
- Multiple operators with different card issuing authorizations
- Lock operation record printable: 1000 pcs or more
- Receptionist card issuing records printable
- Power: 4 pcs AA Alkaline batteries. 18 months duration
- Low battery voltage warning. (Lower than 3.5V.)
- Self Error detecting by LED and beep
- Improper lock warning
- Wireless stand alone lock realizes 95% of online lock function
- Passage function available
- Can be integrared with 16 public areas such as Lift/Parking/Swimming Pool/Sauna Room/Tennis court/Gym..etc That is to say, one Guest card not only can open its own Guest room but also cab open other common areas such as Lift, Parking, Club, Swimming...etc optionally (such as if the guest pays for Lift, Parking, Club, Swimm,ng... etc, his Guest card can open its own Guest Room and Lift, Parking, Club, Swinning..etc, If not, his Guest card can only open its own Guest room). Also it is suitable for suite Guest room

HLS E3091G Mifare RFID Lock

Valuable Features:
Stainless steel,Fancy Look,ANSI Standard
Replace your old mechanical Lock with our electronic lock
Keep your mortise and carpentry, save your door & money

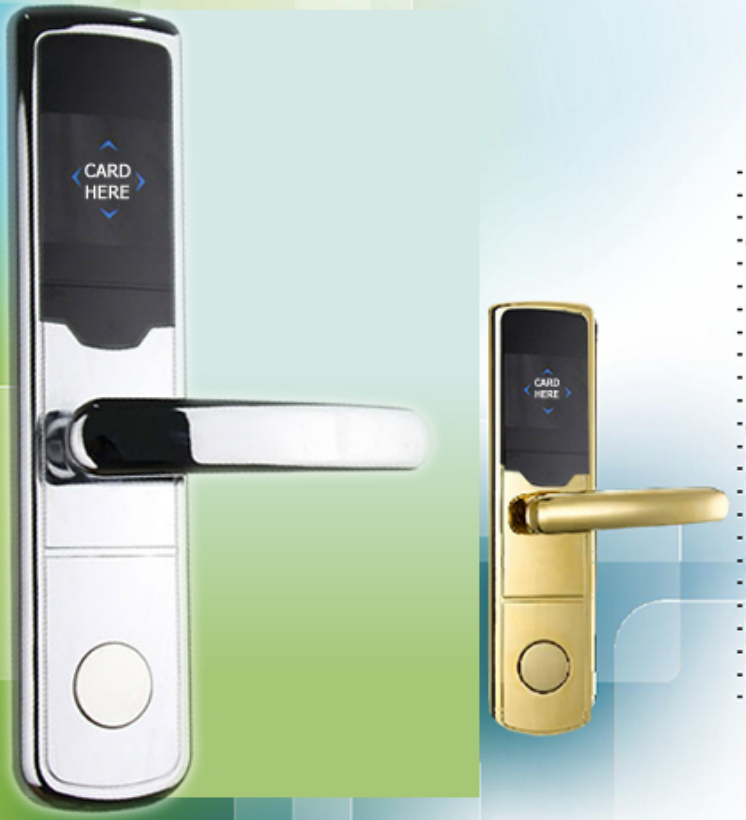

TECHNICAL PARAMETERS

Dimension of External Panel:	245mm*78mm*17mm
Material:	Stainless Steel, Moisture Proof, Fire Reterdant
Working Voltage:	DC 6V or 4 AA Alkaline batteries
Power Consumption:	Static Load <15Ua Dynamic Load 200~400Ma
Working Enviroment:	Working Humidity: 20%-90% Working Temperature: -50 C-80 C
Keycard Option:	MIFARE 1K card

FUNCTIONAL CHARACTERISTICS

- Interface with most of the PMS systems, Fidelio/Opera registered!
- CE & FCC Certified!
- Brushed stainless steel color with PVD coating lasting more than10 years
- ANSI standard mortise
- No electronic inside mortise, Inside handle retracts latches and deadbolt
- Mifare 1K card compatible with Mifare Energy Saver
- Override Computer Key for Emergency use, individual or master cylinder
- Personalized locking system and cylinder cover
- Step by step installation software, easy operation
- Classified Access Authorization for safety management
- General master card, building master card, floor master card, guest card, Fire alarm card
- All cards with validity, guest card expires automatically at default check out date and time
- Meeting room function and three levels of passage door functions
- Lost guess card suspension simply by issuing a new guest card with suspending function
- Multiple operators with different card issuing authorizations
- Lock operation record printable:1000 pcs or more
- Receptionist card issuing records printable
- Power: 4 pcs AA Alkaline batteries. 18 months duration
- Low battery voltage warning. (Lower than 3.5V.)
- Self Error detecting by LED and beep
- Improper lock warning
- Wireless stand alone lock realizes 95% of online lock function
- Passage function available
- Can be integrared with 16 public areas such as Lift/Parking/Swimming Pool/Sauna Room/Tennis court/Gym..etc That is to say, one Guest card not only can open its own Guest room but also cab open other common areas such as Lift, Parking, Club, Swimming...etc optionally (such as if the guest pays for Lift, Parking, Club, Swimm,ng... etc, his Guest card can open its own Guest Room and Lift, Parking, Club, Swinning..etc, If not, his Guest card can only open its own Guest room). Also it is suitable for suite Guest room

HLS E3161P Mifare RFID Lock

Valuable Features:
Stainless steel material, moisture proof, fire retardant
European Standard mortise 72mm/85mm hole distance
Mortise thickness 18mm,strike thickness 22mm

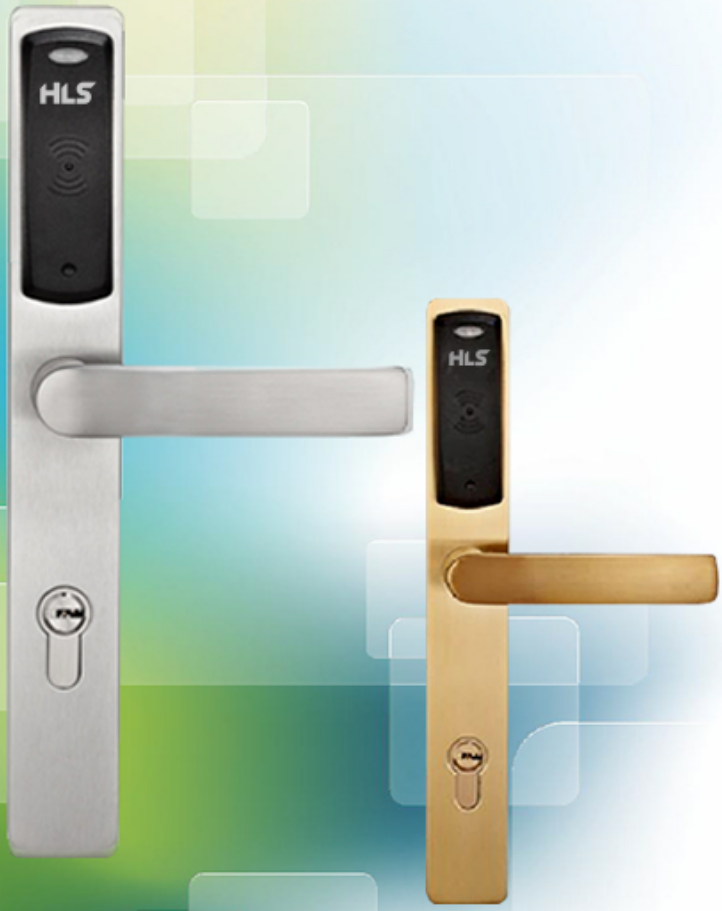

TECHNICAL PARAMETERS

Dimension of External Panel:	245mm*78mm*17mm
Material:	Stainless Steel, Waterproof, Rainproof
Working Voltage:	DC 6V or 4 AA Alkaline batteries
Power Consumption:	Static Load <15Ua Dynamic Load 200Ma-400Ma
Working Enviroment:	Working Humidity: 20%-90% Working Temperature: -50 C-60 C
Keycard Option:	MIFARE 1K card

FUNCTIONAL CHARACTERISTICS

- Interface with most of the PMS systems, Fidelio/Opera registered!
- Brushed stainless steel color with PVD coating lasting more than10 years
- Inside Dead Bolt. Inside handle retracts latches and deadbolt.
- Mifare card, 100,000 times life, high security, compatible with Energy Saver.
- Override Computer Key for Emergency use, individual/master cylinder
- Step by step installation software, easy operation. OEM locking system available.
- Classified Access Authorization for safety management.
- General master card, building master card, floor master card, guest card, Fire-alarm card
- All card with validity, guest card expires automatically at default check out date and time.
- Meeting room function and three levels of passage door functions.
- Lost guest card suspension simply by issuing a new guest card with suspending function.
- Multiple operators with different card issuing authorization
- Lock operation record printable. 1000 pcs or more
- Receptionist card issuing records printable
- Power:4 pcs AAA Alkaline batteries. 18 months' duration
- Low Battery Voltage warning. (Lower than 3.5 V.)
- Self Error detecting by LED and "beep".
- Improper lock warning
- Wireless stand alone lock realizes 95% of on line lock function.
- Can be integrated with Lift/Parking/Swimming/Sauna Room/Gym access…etc(One card system)
- CE & FCC Certified! Standard mortise

◆ HLS S3072H Mifare RFID Lock

Valuable Features:
Split Model, Hidden cylinder and sliding reader beautify two-part lock
Replace your old mechanical Lock with our electronic lock
Keep your mortise and carpentry, save your door & money

TECHNICAL PARAMETERS

Dimension of External Panel:	L95mm*W62mm*H26,8mm
Material:	Stainless Steel, Moisture Proof, Fire Reterdant
Working Voltage:	DC 6V or 4 AA Alkaline batteries
Power Consumption:	Static Load <10Ua Dynamic Load 100~150Ma
Working Enviroment:	Working Humidity: 20%-90% Working Temperature: -50 C-60 C
Keycard Option:	MIFARE 1K card

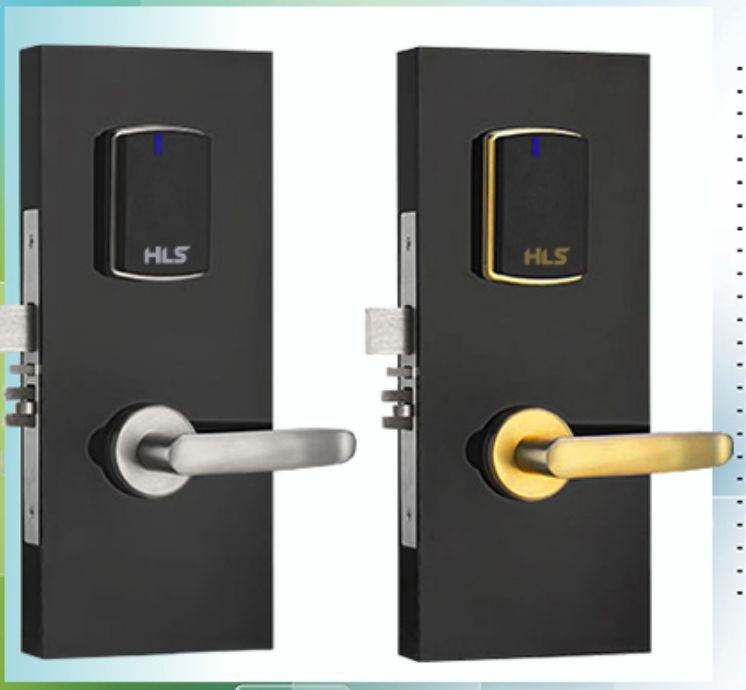

FUNCTIONAL CHARACTERISTICS

- Interface with most of the PMS systems, Fidelio/Opera registered!
- CE & FCC Certified!
- Stainless steel color last more than 10 years
- ANSI standard mortise
- No electronic inside mortise, Inside handle retracts latches and deadbolt
- Mifare 1K card compatible with Mifare Energy Saver
- Override Computer Key for Emergency use, individual or master cylinder
- Personalized locking system and cylinder cover
- Step by step installation software, easy operation
- Classified Access Authorization for safety management
- General master card, building master card, floor master card, guest card, Fire alarm card
- All cards with validity, guest card expires automatically at default check out date and time
- Meeting room function and three levels of passage door functions
- Lost guess card suspension simply by issuing a new guest card with suspending function
- Multiple operators with different card issuing authorizations
- Lock operation record printable:1000 pcs or more
- Receptionist card issuing records printable
- Power: 4 pcs AA Alkaline batteries. 18 months duration
- Low battery voltage warning. (Lower than 3.5V.)
- Self Error detecting by LED and beep
- Improper lock warning
- Wireless stand alone lock realizes 95% of online lock function
- Passage function available
- Can be integrated with 16 public areas such as Lift/Parking/Swimming Pool/Sauna Room/Tennis court/Gym..etc That is to say, one Guest card not only can open its own Guest room but also cab open other common areas such as Lift, Parking, Club, Swimming...etc optionally (such as if the guest pays for Lift, Parking, Club, Swimm,ng... etc, his Guest card can open its own Guest Room and Lift, Parking, Club, Swinning..etc, If not, his Guest card can only open its own Guest room). Also it is suitable for suite Guest room

◆ HLS S3163P Mifare RFID Lock

Valuable Features:

Fancy look, Split Model, Euro Standard
Replace your old mechanical Lock with our electronic lock
Keep your mortise and carpentry, save your door & money

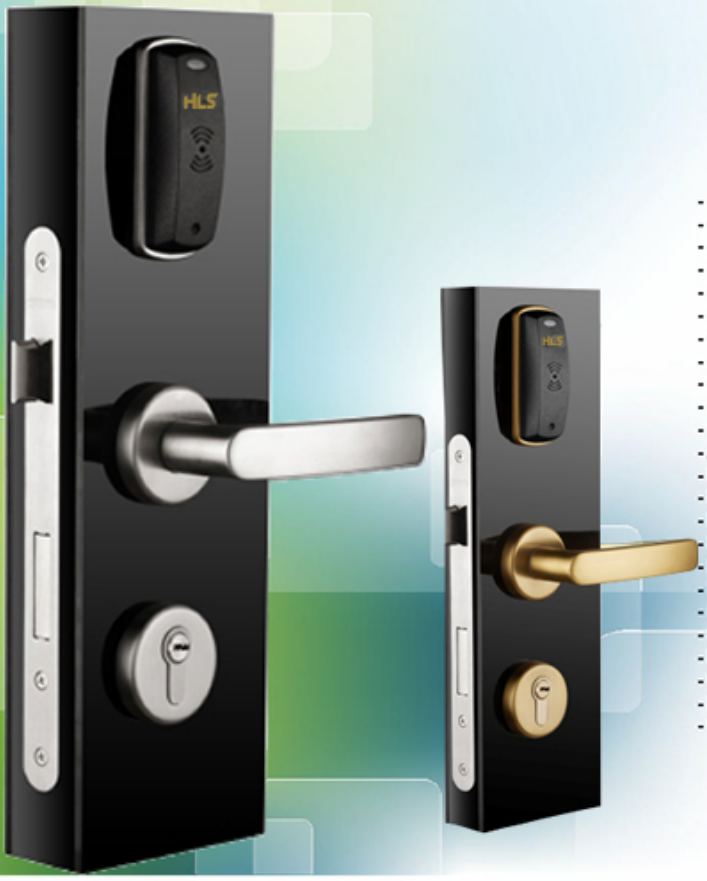

TECHNICAL PARAMETERS

Dimension of External Panel:	245mm*78mm*17mm
Material:	Stainless steel 304, moisture proof, fire retardant
Working Voltage:	DC 6V or 4 AA Alkaline batteries
Power Consumption:	Static Load <15Ua Dynamic Load 200~400Ma
Working Enviroment:	Working Humidity: 20%-90% Working Temperature: -50 C-80 C
Keycard Option:	MIFARE 1K card

FUNCTIONAL CHARACTERISTICS

- Interface with most of the PMS systems, Fidelio/Opera registered!
- CE & FCC Certified!
- Stainless steel color last more than 10 years
- European standard mortise
- No electronic inside mortise, Inside handle retracts latches and deadbolt
- Mifare 1K card compatible with Mifare Energy Saver
- Override Computer Key for Emergency use, individual or master cylinder
- Personalized locking system and cylinder cover
- Step by step installation software, easy operation
- Classified Access Authorization for safety management
- General master card, building master card, floor master card, guest card, Fire alarm card
- All cards with validity, guest card expires automatically at default check out date and time
- Meeting room function and three levels of passage door functions
- Lost guess card suspension simply by issuing a new guest card with suspending function
- Multiple operators with different card issuing authorizations
- Lock operation record printable:1000 pcs or more
- Receptionist card issuing records printable
- Power: 4 pcs AA Alkaline batteries. 18 months duration
- Low battery voltage warning. (Lower than 3.5V.)
- Self Error detecting by LED and beep
- Improper lock warning
- Wireless stand alone lock realizes 95% of online lock function
- Passage function available
- Can be integrated with 16 public areas such as Lift/Parking/Swimming Pool/Sauna Room/Tennis court/Gym..etc That is to say, one Guest card not only can open its own Guest room but also cab open other common areas such as Lift, Parking, Club, Swimming...etc optionally (such as if the guest pays for Lift, Parking, Club, Swimm,ng... etc, his Guest card can open its own Guest Room and Lift, Parking, Club, Swinning..etc, If not, his Guest card can only open its own Guest room). Also it is suitable for suite Guest room

◆ HLS E3033 Mifare RFID Lock

Valuable Features:

Stylish design, customized hidden cylinder
Replace your old mechanical Lock with our electronic lock
Keep your mortise and carpentry, save your door & money



TECHNICAL PARAMETERS

Material:	Stainless steel 304, moisture proof, fire retardant
Working Voltage:	DC 6V or 4 AA Alkaline batteries
Power Consumption:	Static Load <15Ua Dynamic Load 200~400Ma
Working Enviroment:	Working Humidity: 20%-90% Working Temperature: -50 C-80 C
Keycard Option:	MIFARE 1K card

FUNCTIONAL CHARACTERISTICS

- Interface with most of the PMS systems, Fidelio/Opera registered!
- CE & FCC Certified!
- Brushed stainless steel color with PVD coating lasting more than10 years
- ANSI standard mortise
- No electronic inside mortise, Inside handle retracts latches and deadbolt
- Mifare 1K card compatible with Mifare Energy Saver
- Override Computer Key for Emergency use, individual or master cylinder
- Personalized locking system and cylinder cover
- Step by step installation software, easy operation
- Classified Access Authorization for safety management
- General master card, building master card, floor master card, guest card, Fire alarm card
- All cards with validity, guest card expires automatically at default check out date and time
- Meeting room function and three levels of passage door functions
- Lost guess card suspension simply by issuing a new guest card with suspending function
- Multiple operators with different card issuing authorizations
- Lock operation record printable:1000 pcs or more
- Receptionist card issuing records printable
- Power: 4 pcs AA Alkaline batteries. 18 months duration
- Low battery voltage warning. (Lower than 3.5V.)
- Self Error detecting by LED and beep
- Improper lock warning
- Wireless stand alone lock realizes 95% of online lock function
- Passage function available
- Can be integrated with 16 public areas such as Lift/Parking/Swimming Pool/Sauna Room/Tennis court/Gym..etc That is to say, one Guest card not only can open its own Guest room but also cab open other common areas such as Lift, Parking, Club, Swimming...etc optionally (such as if the guest pays for Lift, Parking, Club, Swimm,ng... etc, his Guest card can open its own Guest Room and Lift, Parking, Club, Swinning..etc, If not, his Guest card can only open its own Guest room). Also it is suitable for suite Guest room

◆ HLS E3034 Mifare RFID Lock

Valuable Features:
Stylish design, customized hidden cylinder
Replace your old mechanical Lock with our electronic lock
Keep your mortise and carpentry, save your door & money

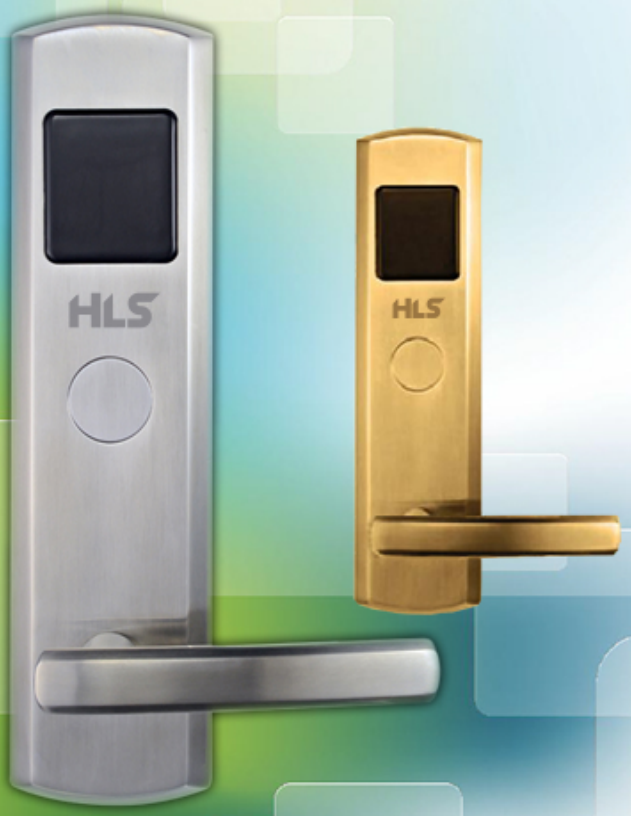

TECHNICAL PARAMETERS

Dimension of External Panel:	245mm*78mm*17mm
Material:	Stainless Steel, Moisture Proof, Fire Reterdant
Working Voltage:	DC 6V or 4 AA Alkaline batteries
Power Consumption:	Static Load <10Ua Dynamic Load 200~400Ma
Working Enviroment:	Working Humidity: 20%-95% Working Temperature: -45 C-80 C
Keycard Option:	MIFARE 1K card

FUNCTIONAL CHARACTERISTICS

- Interface with most of the PMS systems, Fidelio/Opera registered!
- CE & FCC Certified!
- Brushed stainless steel color with PVD coating lasting more than10 years
- ANSI standard mortise
- No electronic inside mortise, Inside handle retracts latches and deadbolt
- Mifare 1K card compatible with Mifare Energy Saver
- Override Computer Key for Emergency use, individual or master cylinder
- Personalized locking system and cylinder cover
- Step by step installation software, easy operation
- Classified Access Authorization for safety management
- General master card, building master card, floor master card, guest card, Fire alarm card
- All cards with validity, guest card expires automatically at default check out date and time
- Meeting room function and three levels of passage door functions
- Lost guess card suspension simply by issuing a new guest card with suspending function
- Multiple operators with different card issuing authorizations
- Lock operation record printable:1000 pcs or more
- Receptionist card issuing records printable
- Power: 4 pcs AA Alkaline batteries. 18 months duration
- Low battery voltage warning. (Lower than 3.5V.)
- Self Error detecting by LED and beep
- Improper lock warning
- Wireless stand alone lock realizes 95% of online lock function
- Passage function available
- Can be integrared with 16 public areas such as Lift/Parking/Swimming Pool/Sauna Room/Tennis court/Gym..etc That is to say, one Guest card not only can open its own Guest room but also cab open other common areas such as Lift, Parking, Club, Swimming...etc optionally (such as if the guest pays for Lift, Parking, Club, Swimm,ng... etc, his Guest card can open its own Guest Room and Lift, Parking, Club, Swinning..etc, If not, his Guest card can only open its own Guest room). Also it is suitable for suite Guest room

◆ HLS E3370 Mifare RFID Lock

Valuable Features:
Stylish design, customized hidden cylinder
Replace your old mechanical Lock with our electronic lock
Keep your mortise and carpentry, save your door & money

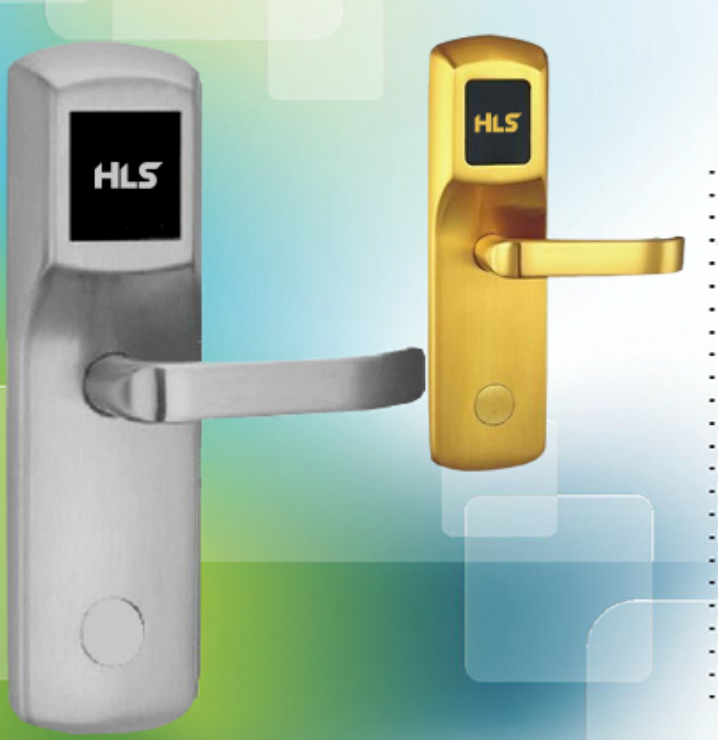

TECHNICAL PARAMETERS

Dimension of External Panel:	245mm*78mm*17mm
Material:	Stainless Steel, Moisture Proof, Fire Reterdant
Working Voltage:	DC 6V or 4 AA Alkaline batteries
Power Consumption:	Static Load <15Ua Dynamic Load 200~400Ma
Working Enviroment:	Working Humidity: 20%-95% Working Temperature: -45 C-80 C
Keycard Option:	MIFARE 1K card

FUNCTIONAL CHARACTERISTICS

- Interface with most of the PMS systems, Fidelio/Opera registered!
- CE & FCC Certified!
- Brushed stainless steel color with PVD coating lasting more than10 years
- ANSI standard mortise
- No electronic inside mortise, Inside handle retracts latches and deadbolt
- Mifare 1K card compatible with Mifare Energy Saver
- Override Computer Key for Emergency use, individual or master cylinder
- Personalized locking system and cylinder cover
- Step by step installation software, easy operation
- Classified Access Authorization for safety management
- General master card, building master card, floor master card, guest card, Fire alarm card
- All cards with validity, guest card expires automatically at default check out date and time
- Meeting room function and three levels of passage door functions
- Lost guess card suspension simply by issuing a new guest card with suspending function
- Multiple operators with different card issuing authorizations
- Lock operation record printable:1000 pcs or more
- Receptionist card issuing records printable
- Power: 4 pcs AA Alkaline batteries. 18 months duration
- Low battery voltage warning. (Lower than 3.5V.)
- Self Error detecting by LED and beep
- Improper lock warning
- Wireless stand alone lock realizes 95% of online lock function
- Passage function available
- Can be integrared with 16 public areas such as Lift/Parking/Swimming Pool/Sauna Room/Tennis court/Gym..etc That is to say, one Guest card not only can open its own Guest room but also cab open other common areas such as Lift, Parking, Club, Swimming...etc optionally (such as if the guest pays for Lift, Parking, Club, Swimm,ng... etc, his Guest card can open its own Guest Room and Lift, Parking, Club, Swinning..etc, If not, his Guest card can only open its own Guest room). Also it is suitable for suite Guest room

◆ HLS FL-8603S Mifare RFID Lock

Valuable Features:
Stylish design, customized hidden cylinder
Replace your old mechanical Lock with our electronic lock
Keep your mortise and carpentry, save your door & money

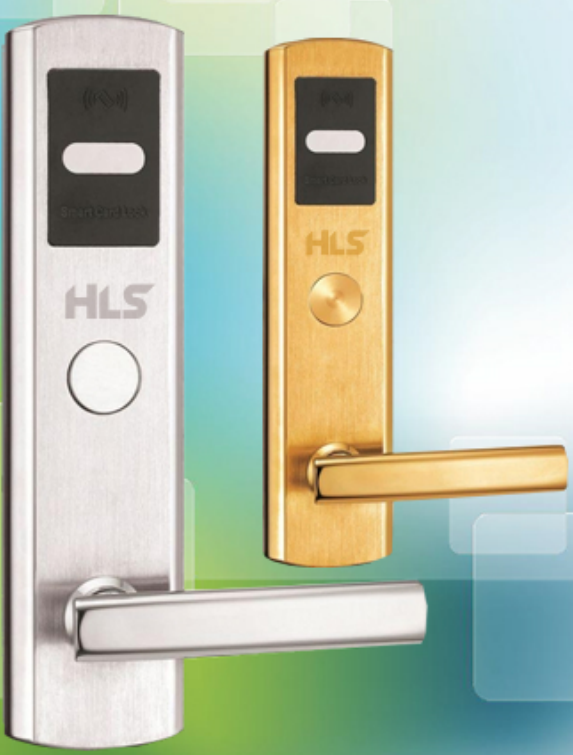

TECHNICAL PARAMETERS

Dimension of External Panel:	W73mm*H220mm
Material:	Stainless Steel, Moisture Proof, Fire Reterdant
Working Voltage:	DC 6V or 4 AA Alkaline batteries
Power Consumption:	Static Load <10Ua Dynamic Load 100~150Ma
Working Enviroment:	Working Humidity: 20%-95% Working Temperature: -45 C-80 C
Keycard Option:	MIFARE 1K card

FUNCTIONAL CHARACTERISTICS

- Interface with most of the PMS systems, Fidelio/Opera registered!
- CE & FCC Certified!
- Stainless steel material, moisture proof, fire retardant, lasting more than 10 years
- ANSI Standard mortise/Euro standard mortise. Inside Dead Bolt. Inside handle retracts latches and deadbolt
- No electronic inside mortise, Inside handle retracts latches and deadbolt
- Mifare 1K card compatible with Mifare Energy Saver
- Override Computer Key for Emergency use, individual or master cylinder
- Personalized locking system and cylinder cover
- Step by step installation software, easy operation
- Classified Access Authorization for safety management
- General master card, building master card, floor master card, guest card, Fire alarm card
- All cards with validity, guest card expires automatically at default check out date and time
- Lost guess card suspension simply by issuing a new guest card with suspending function
- Multiple operators with different card issuing authorizations
- Lock operation record printable:1000 pcs or more
- Receptionist card issuing records printable
- Power: 6V AA alkaline batteries,18 months' duration,
- Low battery voltage warning. (Lower than 3.5V.)
- Self Error detecting by LED and beep
- Improper lock warning
- Wireless stand alone lock realizes 95% of online lock function
- Suitable door: Wooden door, fire-proof door, metal door and so on

◆ HLS XE-0014 Mifare RFID Lock

Valuable Features:
Stylish design, customized hidden cylinder
Replace your old mechanical Lock with our electronic lock
Keep your mortise and carpentry, save your door & money

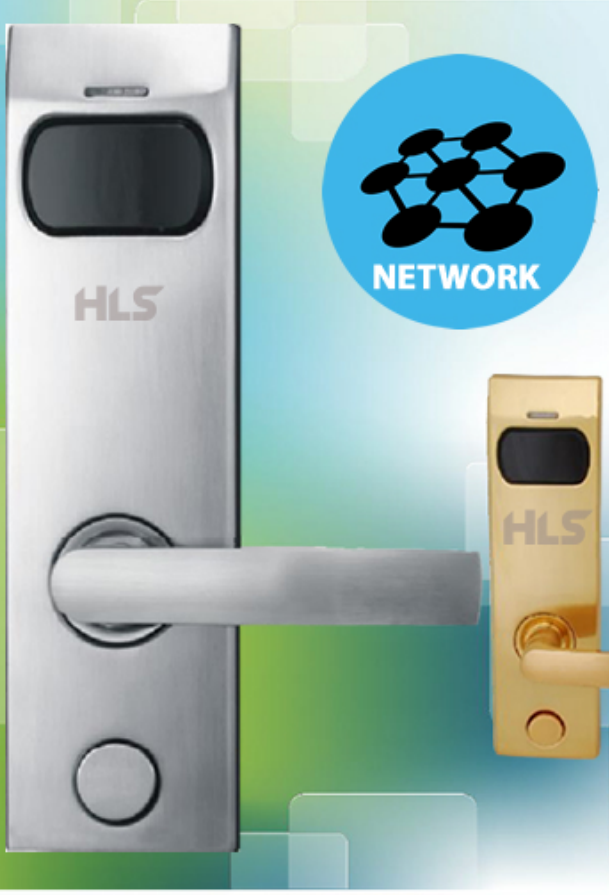

TECHNICAL PARAMETERS

Dimension of External Panel:	W73mm*H220mm
Material:	Stainless Steel, Moisture Proof, Fire Reterdant
Working Voltage:	DC 6V or 4 AA Alkaline batteries
Power Consumption:	Static Load <10Ua Dynamic Load 100~150Ma
Working Enviroment:	Working Humidity: 20%-95% Working Temperature: -45 C-80 C
Keycard Option:	MIFARE 1K card

FUNCTIONAL CHARACTERISTICS

- Interface with most of the PMS systems, Fidelio/Opera registered!
- CE & FCC Certified!
- Near Field Communication and Cable NetworkAvailable!
- Stainless steel material, moisture proof, fire retardant, lasting more than 10 years
- ANSI Standard mortise/Euro standard mortise. Inside Dead Bolt. Inside handle retracts latches and deadbolt
- No electronic inside mortise, Inside handle retracts latches and deadbolt
- Mifare 1K card compatible with Mifare Energy Saver
- Override Computer Key for Emergency use, individual or master cylinder
- Personalized locking system and cylinder cover
- Step by step installation software, easy operation
- Classified Access Authorization for safety management
- General master card, building master card, floor master card, guest card, Fire alarm card
- All cards with validity, guest card expires automatically at default check out date and time
- Lost guess card suspension simply by issuing a new guest card with suspending function
- Multiple operators with different card issuing authorizations
- Lock operation record printable:1000 pcs or more
- Receptionist card issuing records printable
- Power: 6V AA alkaline batteries,18 months' duration,
- Low battery voltage warning. (Lower than 3.5V.)
- Self Error detecting by LED and beep
- Improper lock warning
- Wireless stand alone lock realizes 95% of online lock function
- Suitable door: Wooden door, fire-proof door, metal door and so on

◆ HLS XE-0018 Mifare RFID Lock

Valuable Features:
Stylish design, customized hidden cylinder
Replace your old mechanical Lock with our electronic lock
Keep your mortise and carpentry, save your door & money

TECHNICAL PARAMETERS

Dimension of External Panel:	W85mm*H58.5mm
Material:	Copper plus mirror polish Wide handle
Working Voltage:	DC 6V or 4 AA Alkaline batteries
Power Consumption:	Static Load <10Ua Dynamic Load 100~200Ma
Working Enviroment:	Working Humidity: 20%-95% Working Temperature: -45 C-80 C
Keycard Option:	MIFARE 1K card

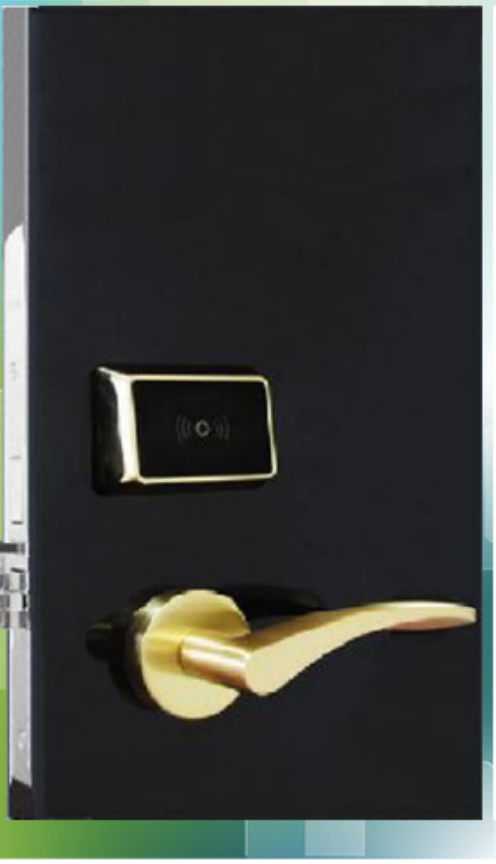

FUNCTIONAL CHARACTERISTICS

- Interface with most of the PMS systems, Fidelio/Opera registered!
- CE & FCC Certified!,
- Near Field Communication (NFC) Available
- Copper plus mirror polish, lasting more than 10 years
- ANSI Standard mortise, Inside Dead Bolt. Inside handle retracts latches and deadbolt
- No electronic inside mortise, Inside handle retracts latches and deadbolt
- Mifare 1K card compatible with Mifare Energy Saver
- Override Computer Key for Emergency use, individual or master cylinder
- Personalized locking system and cylinder cover
- Step by step installation software, easy operation
- Classified Access Authorization for safety management
- General master card, building master card, floor master card, guest card, Fire alarm card
- All cards with validity, guest card expires automatically at default check out date and time
- Lost guess card suspension simply by issuing a new guest card with suspending function
- Multiple operators with different card issuing authorizations
- Lock operation record printable:1000 pcs or more
- Receptionist card issuing records printable
- Power: 6V AA alkaline batteries,18 months' duration,
- Low battery voltage warning. (Lower than 3.5V.)
- Self Error detecting by LED and beep
- Improper lock warning
- Wireless stand alone lock realizes 95% of online lock function
- Suitable door: Wooden door, fire-proof door, metal door and so on

HLS

hard lock systems

SOM ELEKTRONİK Ticaret İthalat İhracat
Güzeloluk Mahallesi 1886. Sokak No:11 Muratpaşa / ANTALYA
Telefon: 90 (533) 554 13 35
Telefon: 90 (532) 247 43 88
Fax: 90 (242) 324 45 65
E-Mail: info@somelektronik.com.tr